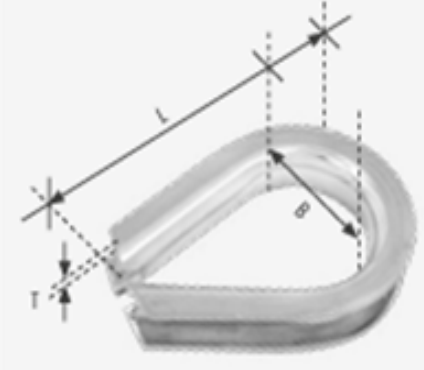


Galvanised Steel – Open Ended Cable Stocking

Size (mm)	Part Number	Wire Size (mm)	Thimbles (mm)	Ferrules		Agg Break Strength (kg)	Eye Length (mm)	Grip Length (mm)	Overall Length (mm)	Shackle (tonne)	Weight (kg)
				Top	Bottom						
6 - 14	CSOPE45	1.2mm	N/A	N/A	2.5	1600	0	830	830	N/A	0.1
14 - 20	CSOPE46	1.2mm	N/A	N/A	2.5	1600	0	920	920	N/A	0.2
20 - 30	CSOPE47	1.5mm	N/A	N/A	2.5	2500	0	1450	1450	N/A	0.3
30 - 40	CSOPE48	2.0mm	N/A	N/A	3	3500	0	2050	2050	N/A	0.8
40 - 50	CSOPE49	2.0mm	N/A	N/A	3	3800	0	2250	2250	N/A	0.9
50 - 60	CSOPE50	2.5mm	N/A	N/A	4	7500	0	3050	3050	N/A	2
60 - 70	CSOPE51	2.5mm	N/A	N/A	4	7500	0	3100	3100	N/A	2
70 - 85	CSOPE52	2.5mm	N/A	N/A	4	7500	0	3250	3250	N/A	2.2
85 - 100	CSOPE53	3.0mm	N/A	N/A	4.5	10000	0	4000	4000	N/A	3.8
100 - 120	CSOPE54	3.0mm	N/A	N/A	4.5	10500	0	4300	4300	N/A	4.6

Thimble Dimensions				
	Size	B(mm)	L(mm)	T (mm)
	6mm	17	40	1.5
	8mm	22.5	51	1.5
	10mm	26	58.5	2
	14mm	34	74	2.5
	16mm	37.5	83	2.5